

DynaStar® HH-E VER

Tall Chamber High Temperature Sanitizing
Ventless Door-type with Energy Recovery

Standard Features

- ▶ Ventless: does not require a hood
- ▶ Unique, two-pass Energy Recovery System
- ▶ Door interlock keeps door locked during cycle
- ▶ Dual certified as both a dishwasher and a potwasher at all cycle settings
- ▶ Built-in 40-70 °F rise booster heater with Sani-Sure™ final rinse system ensures proper rinse water temperature
- ▶ Pumped rinse for consistent rinse pressure
- ▶ Adjustable rinse system
 - Econo uses 0.72 gallons per rack
 - Turbo uses 0.89 gallons per rack
- ▶ Automatic tank fill
- ▶ Door-actuated start
- ▶ Three (3) selectable timed cycles
- ▶ Digital LED display
- ▶ Onboard digital diagnostics
- ▶ Delime cycle
- ▶ 27" (686 mm) vertical chamber clearance
- ▶ Triple wash arm system provides consistent and reliable washing performance
- ▶ Specially designed stainless steel nozzles provide superior cleaning action
- ▶ 2 HP stainless steel wash pump motor
- ▶ Vent fan control shuts vent fan off when machine is idle
- ▶ Interchangeable scrap baskets
- ▶ Single point connections for all utilities
- ▶ Field convertible from straight through to corner and vice versa (kit required)
- ▶ Field convertible from 3-phase to single phase and vice versa (kit required)
- ▶ Low watt density electric wash tank heater
- ▶ Hi-limit thermostat and low water protection
- ▶ Detergent/rinse additive signal connection fuse box
- ▶ Front and side stainless steel dress panels
- ▶ Adjustable bullet feet
- ▶ Durable stainless steel construction



DynaStar® HH-E VER

Specification Statement

Specified unit will be a Jackson DynaStar tall chamber high temperature sanitizing ventless door-type dishwasher with two-pass energy recovery system, rated to NSF/ANSI Standard 3 by ETL Sanitation. Unit will be ENERGY STAR® certified and will be dual certified as both a dishwasher and a potwasher on all cycle settings. Unit to be rated for 40 racks per hour, 0.72 gallons per rack, and will include a built-in 40-70 °F rise booster heater with Sani-Sure™ final rinse system, three (3) selectable timed cycles, solid-state controls with digital LED temperature/operator display and service diagnostics. Unit will have an adjustable rinse system, Econo Rinse uses 0.72 gallons per rack; Turbo Rinse uses 0.89 gallons per rack. Other features include automatic tank fill, delime cycle, triple wash arm system, pumped final rinse, vent fan control, and 2 HP stainless steel wash pump motor. Height of dishmachine including heat exchanger shall be 71 1/2". Constructed of durable stainless steel with adjustable bullet feet.

1-year parts and labor warranty.

Options & Accessories


- ▶ 460v Electrical
- ▶ Single Phase
- ▶ Drain Water Tempering Kit
- ▶ Water Hammer Arrestor
- ▶ False Panel (for corner installations)
- ▶ Flanged Feet
- ▶ Security Package
- ▶ Scaltrol
- ▶ Replacement Cartridge for Scaltrol
- ▶ 36-Compartment Rack 4-1/8" tall (105 mm)
- ▶ 5-5/8" tall (143 mm)
- ▶ 7" tall (178 mm)
- ▶ Combination Rack
- ▶ Peg Rack



Digital LED Display

Cleanability

Our triple wash arm system is engineered to focus more water on the dishes for superior cleaning performance. Our adjustable rinse system keeps you in control - choose Econo or Turbo based on the soil level of each load. The 27" vertical chamber clearance accommodates larger ware so don't forget the pots and pans! The DynaStar HH-E is dual certified as a dishwasher and a potwasher.

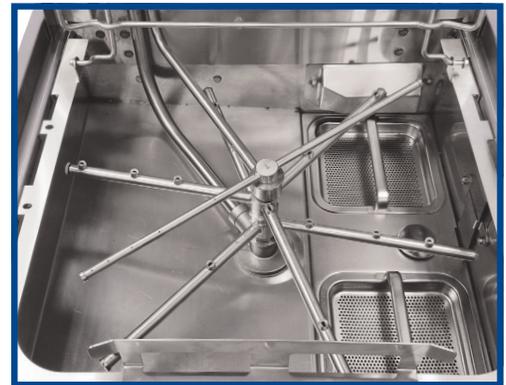

Triple Wash Arm System

Operation


Ventless mean virtually no steam is released into the dishroom. Easy-to-read digital controls, handles on three sides, and a door-activated drain closure make operation of the DynaStar HH-E VER a breeze.



Interchangeable Scrap Baskets

Serviceability

Ease of serviceability is important to Jackson, so the DynaStar HH-E VER was designed to make service access easy.


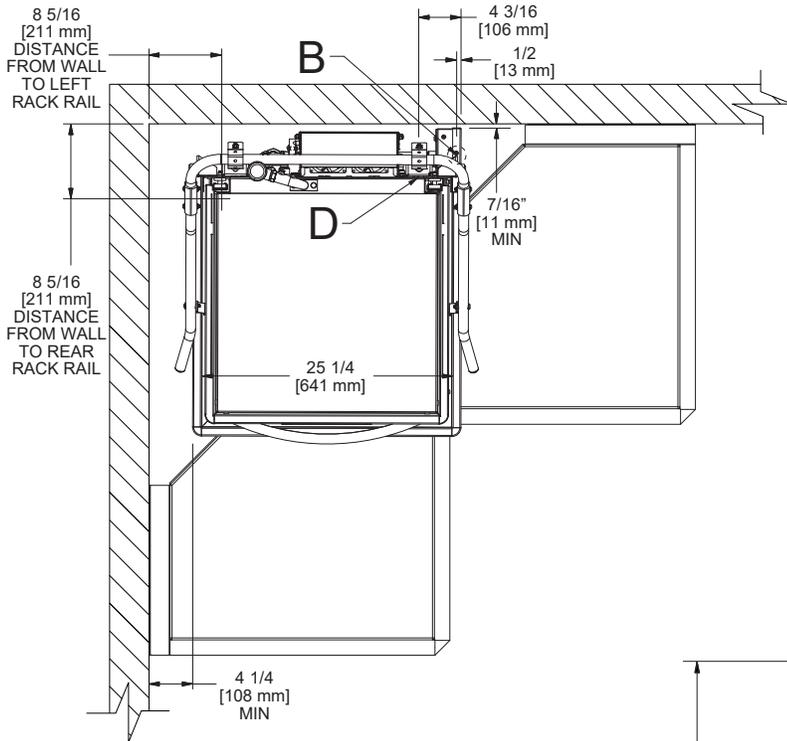


LEGEND

- A - Drain Connection (1 1/2" NPT)
- B - Water Inlet (1/2" NPT)
- C - Electrical Connection
- D - Detergent Connection
- E - Rinse-aid Connection

All dimensions from floor can be increased 1 1/8" using the machine's adjustable feet.

Dish tables are stationary, so the machine must be moved until rack rails line-up properly. As a result, distances from wall to rack rails might vary.

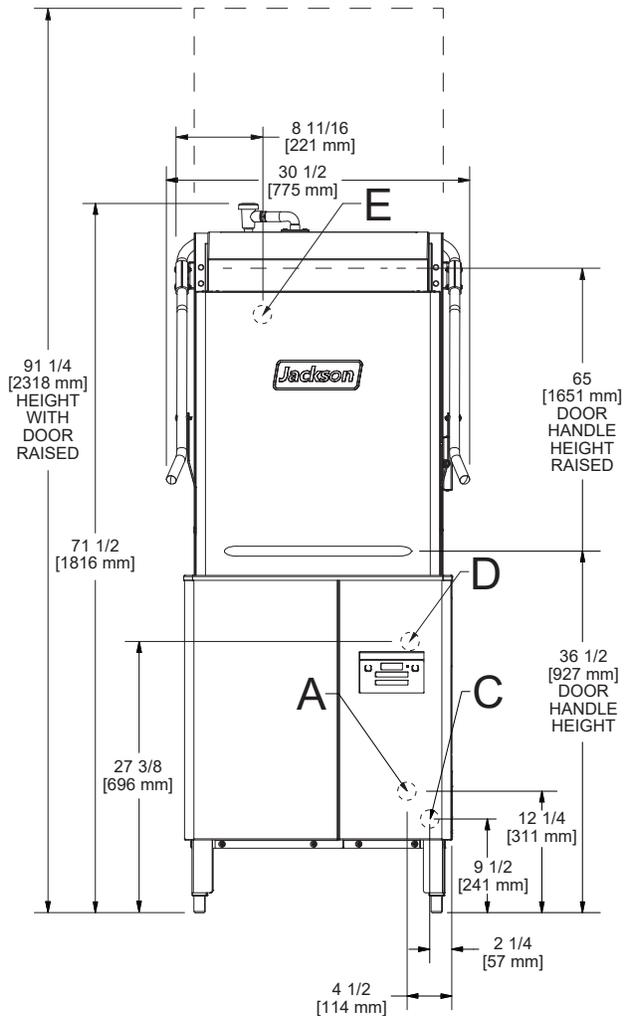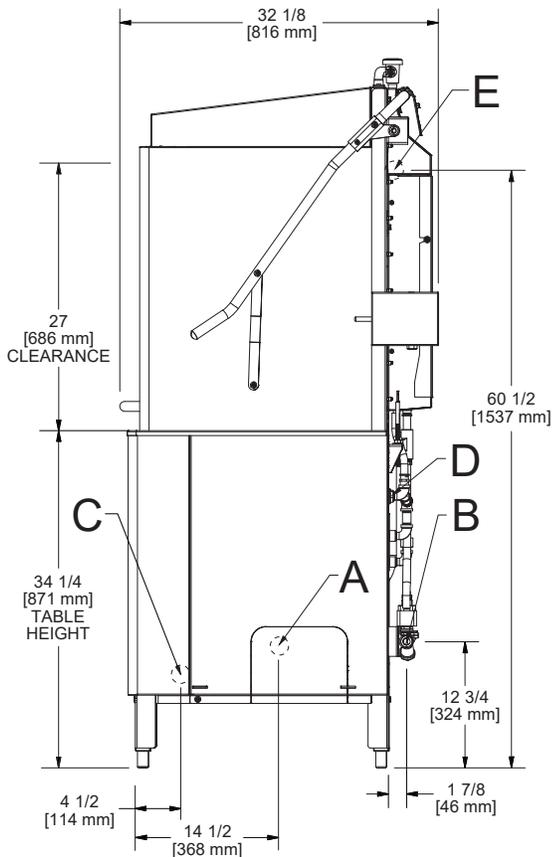



Warewashing Systems

DynaStar® HH-E VER

Tall Chamber High Temperature Sanitizing
Ventless Door-type with Energy Recovery

Operating Capacity (Cycle I)

Racks per Hour	40 (38)*
Dishes per Hour	1,000
Glasses per Hour	1,440

Operating Temperature

Wash Temperature (minimum)	150 °F/66 °C
Rinse Temperature (minimum)	180 °F/82 °C

Operating Cycle (seconds)

	Wash	Rinse	Dwell	Vent	Total Cycle
Cycle I	40	11	07	30	88
Cycle II	90	11	07	30	138
Cycle III	220	11	07	30	268

Water Consumption

Gallons per Rack (Econo rinse)	0.72 (2.7 L)
Gallons per Rack (Turbo rinse)	0.89 (3.4 L)
Gallons per Hour (Econo rinse)	28.80 (109.0 L)
Gallons per Hour (Econo rinse)**	27.36 (103.6 L)
Gallons per Hour (Turbo rinse)	35.96 (136.1 L)
Gallons per Hour (Turbo rinse)**	33.82 (128.0 L)
Wash Tank Capacity (gallons)	8.00 (30.3 L)
Booster Tank Capacity (gallons)	1.66 (6.3 L)

Water Requirements

Incoming Water Temperature	40-90 °F/5-33 °C
Flow Pressure (PSI)	15 - 65
Incoming Water Connection (NPT)	1/2"
Drain Connection (ID)	1 1/2"

Electrical Specifications

Wash Pump Motor (HP)	
208v	2
230v	2
460v	2
Wash Tank Heater (kW)	
208v	4.1
230v	5.2
460v	5.0
Rinse Tank Heater (kW)	
208v	9.0
230v	11.2
460v	9.2

Power Supply	Total Load	Minimum Circuit Ampacity	Maximum Overcurrent Protection
208/60/3	49.3 A	52.3 A	60.0 A
230/60/3	52.9 A	55.6 A	60.0 A
460/60/3	21.4 A	22.1 A	25.0 A
208/60/1	75.9 A	78.9 A	90.0 A
230/60/1	83.0 A	85.8 A	90.0 A

Heat Output (BTU/HR)

Latent Heat	6047
Sensible Heat	5834

Dimensions

Width	30 1/2" (775 mm)
Depth	32 1/8" (816 mm)
Height	71 1/2" (1816 mm)
Height with Door Open	91 3/4" (2318 mm)
Inside Clearance Height	27" (686 mm)
Wall Clearance	
Rear	7/16" (11 mm)
Left Side (corner installation)	4 1/4" (108 mm)
Drain Height	12 1/4" (311 mm)

Shipping Details

Shipping Weight	411 lbs (181 kg)
Shipping Width	33" (838 mm)
Shipping Depth	42" (1067 mm)
Shipping Height	77" (1956 mm)
Shipping Cube	61.76 cu ft
Shipping Class	150

*Racks per hour calculated with NSF suggested load time of :05 for door-type (straight thru) dishmachines.

**Gallons per hour calculated with NSF suggested load time of :05 for door-type (straight thru) dishmachines.

DynaStar HH-E VER is equipped with a pumped rinse, so a PRV is not required unless flow pressure is over 65 PSI. Flow pressure under 15 PSI could affect fill/start-up time.

Contact Jackson

07610-005-02-65 [02/09/22]

Address

6209 N U.S. Highway 25E
Gray, Kentucky 40734

Telephone & Fax

T 888.800.5672
F 606.523.1799

Email

customer.service@jacksonwws.com



JACKSONWWS.COM



JACKSON WAREWASHING SYSTEMS



JACKSON WWS

We reserve the right to change specifications in this document without incurring any obligation for equipment previously or subsequently sold.