

Item# _____
Project: _____
Qty: _____

Sandwich Prep Table

SP36-12M-HC 2 Door Sandwich Prep Unit



15 Pan Unit

Features

- CFC free refrigerant & foam
- AISI 304 stainless steel framework construction
- Electronic thermostat & digital LED temperature display for accurate control & easy reading
- Auto defrosting & auto evaporation of condensation water
- Magnetic gaskets can be replaced without any tool
- PC plastic pans & plastic cutting board are included
- Unit ships with casters installed (2 brake & 2 non brake)

Serv-Ware SP Series Prep Tables are UL Safety and UL Sanitation Approved.

Featured with Stainless Steel exterior, ABS interior liner, Aluminum back, self-closing door, digital controls with a LED readout, foamed in place polyurethane cell insulation, stainless steel slide rail work area with cutting board and a cold topping holding area. The hinged cover helps keep your condiments, meats, and vegetables cold during off-peak hours. Unit is shipped with casters installed (2 Brake and 2 Non Brake).

1/6 size, 6 inch deep plastic pans are included with 1 epoxy coated wire shelf per door, all with adjustable mounting brackets for greater flexibility.

The rear mounted compressor is designed to hold temperatures between 33°F and 41°F.

Conforms to UL471, CSA C22.2 and NSF 7 Standards.

Two Year - Parts & Labor on entire unit. Valid in United States
Three Year - Additional Compressor, Part Only



Serv-Ware
www.servware.com

Phone: (800).768.5953


Revised 1/19

Fax: (800).976.1299



SP36-12M-HC

Sandwich Prep Table

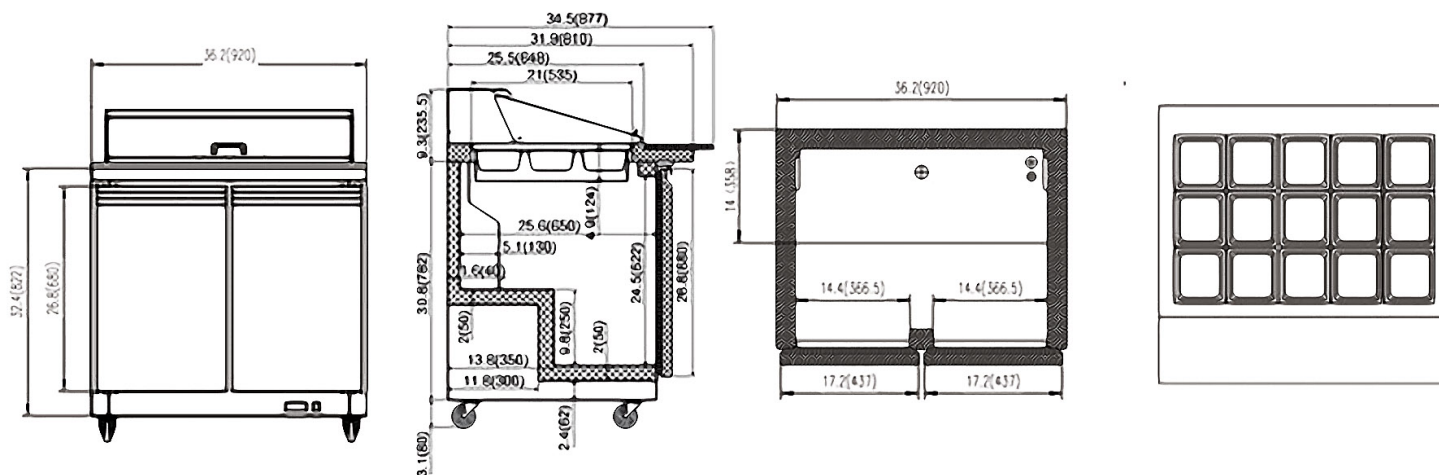

Dimensions

15 Pan Unit

Exterior Dimensions	36.2" W x 34.5" D x 43.2" H
Pan Unit	15 Pans
Net Volume	7 cu. ft.
Shipping Weight	217 lbs

Construction

Exterior Material	Stainless Steel
Interior Material	ABS with S/S Floor
Insulation Material	CFC Free Foam
Shelf Material	Epoxy Coated Wire

Cooling

Temperature Range	33°F – 41°F
Refrigerant	R600
Defrosting	Every 6 Hours
H/P	1/4

Electrical

Voltage	115
Amps	5
Hz	60
Phase	1



Serv-Ware
www.servware.com

Phone: (800).768.5953

Revised 1/19

Fax: (800).976.1299

