



## BC-20G

### Combination-Oven/Steamer



#### OPTIONS AND ACCESSORIES

(AT ADDITIONAL CHARGE)

- **Additional transport cart (shelves not included)**
  - ☐ TC10 - 10 shelf position
  - ☐ TC14 - 14 shelf position
  - ☐ TC20 - 20 shelf position
  - ☐ 96 plate banquet cart
- ☐ MenuSelect control can hold multi-stage programming for up to 99 products, includes Cook & Hold, core probe cooking and USB port
- ☐ Locking control panel
- ☐ Locking door hasp
- ☐ Tamper proof screws
- ☐ Solid door (no glass)
- ☐ Additional stainless steel wire shelves
- ☐ Core temperature probe with digital readout
- ☐ 6-1/2" (165.1mm) seismic legs
- ☐ Chicken roasting rack
- ☐ Backflow preventer
- ☐ Extended warranty

#### OPTIONS AND ACCESSORIES

(AT NO CHARGE)

- ☐ 208/240 volt
- ☐ LP gas

Project \_\_\_\_\_

Item No. \_\_\_\_\_

Quantity \_\_\_\_\_

BC-20G

All data is shown per oven section, unless otherwise indicated.

Refer to operator manual specification chart for listed model names.

#### EXTERIOR CONSTRUCTION

- Stainless steel top, front, sides and back
- Stainless steel door, right hand hinge only
- Dual pane tempered viewing window with hinged inner glass for easy cleaning
- Condensate drip pan on oven transport cart

#### INTERIOR CONSTRUCTION

- Fully welded stainless steel frame
- Fully insulated cooking chamber
- Fixed drain bottom center of cavity
- Easily replaceable oven mounted door gasket

#### OPERATION

- Standard control with four function selection switch for steam, hot air, combined steam/hot air, cool down, Vario Steam® and steam on demand feature
- Solid state rotary dial thermostat - range 150-500°F (66-260°C)
- Motor driven 120 minute timer shuts down at elapsed time
- Two speed fan
- Magnetic door interlock switch shuts off oven when door is opened
- Electronic Ignition
- Automatic temperature control
- Open vented system. Condenses steam and drains away by-products of the cooking process, eliminates flavor transfer
- Automatic steam regulation
- Self-contained, self-flushing steam generator separate from cooking compartment for instant steam recovery when switching modes
- Deliming light flashes when steam generator requires deliming

#### CAPACITY

- ☐ TC14 - 28 steam table pans or 14 bake pans
- ☐ TC20 - 20 steam table pans or 20 bake pans
- ☐ TC10 Prison Cart - 20 steam table pans or 10 bake pans

#### STANDARD FEATURES

- Ten (10) stainless steel wire shelves
- Internal Semi-Automatic Deliming pump with delivery hose and deliming container
- Pressure spray bottle
- Hose and spray assembly for interior cleaning
- TC14 transport cart (14 shelf positions)
- Factory installed water pressure regulator and vented drain assembly (2 per section)
- Start-up inspection service by factory authorized service agent - operational testing and installation inspection
- One year parts and labor oven warranty\*

\* For all international markets, contact your local distributor.




#### BLODGETT OVEN COMPANY

[www.blodgett.com](http://www.blodgett.com)

42 Allen Martin Drive, Essex Junction, VT 05452  
Phone: (802) 658-6600 • Fax: (802) 864-0183




## BC-20G

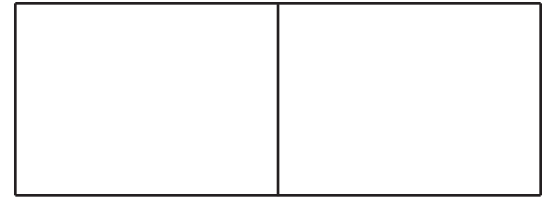

APPROVAL/STAMP

DIMENSIONS ARE IN INCHES (MM)

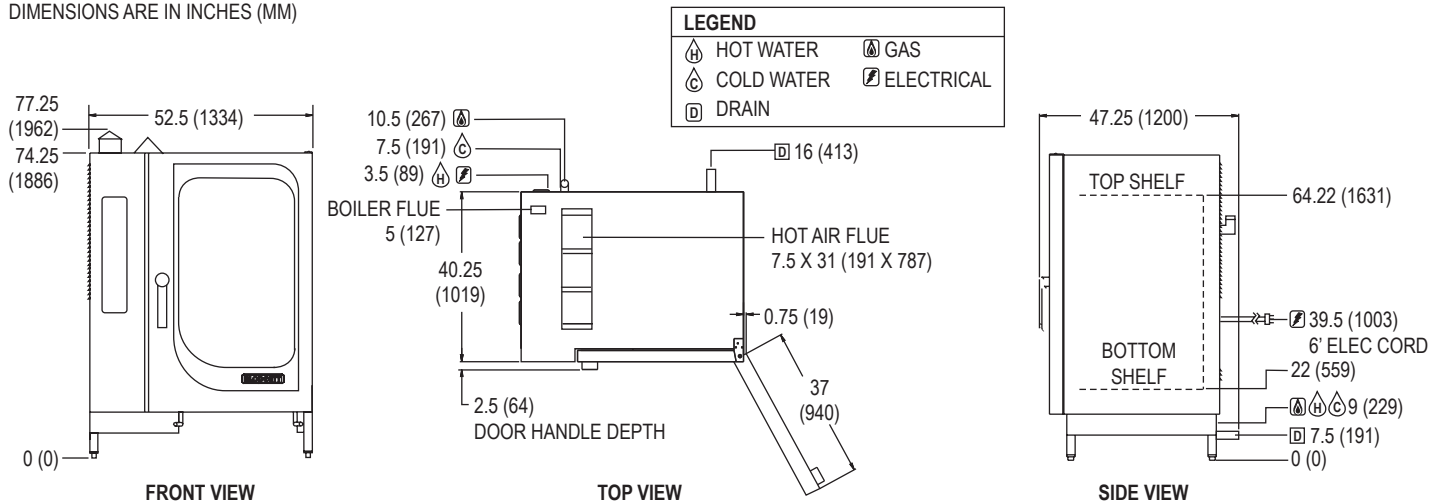

**SHORT FORM SPECIFICATIONS:** Provide Blodgett Combi model BC-20G single or double, gas combination-oven/steamer. Unit shall have the ability to cook with pressureless steam, hot air, or combination of steam and hot air. Mechanical mode switch shall allow the operator to choose four modes, steam, hot air, combi or cool down mode. Timer to be 120 minute motor driven. Temperature control to be solid state with rotary knob. Dual pane tempered viewing window with hinged inner glass for easy cleaning. Unit shall utilize a roll-in cart capable of being used in conjunction with a blast chiller or warming unit. Unit shall include two speed fan, steam on demand feature, deliming indicator light and Vario Steam® feature. The interior shall have the capability of being hosed down for cleaning. Door gaskets shall be easily removable for replacement and cleaning. Unit shall be open vented for waist air quenching. Steam generator shall be separate from the cooking compartment in order to provide the fastest possible steam recovery. Steam generator shall flush automatically to cut down on mineral build up. Unit shall include Deliming container with semi-automatic pump for storing and dispensing deliming solution. A start-up inspection service will be performed by our factory authorized agent at no cost to the operator.

### DIMENSIONS:

Floor space: 47-1/4" D x 52-1/2" W (1200.2 x 1333.5mm)  
Height: 77-1/4" (162.2mm)

### Oven clearances:

Right Side 6" (152.4mm)  
Rear 6" (152.4mm)  
Left Side 6" (152.4mm)

### MINIMUM ENTRY CLEARANCE:

Uncrated 47-1/4" (1200.2mm)  
Crated 49-1/4" (1251mm)

### SHIPPING INFORMATION:

#### Approx. Weight:

BC-20G 1400 lbs. (635 kg)  
Transport Cart 135 lbs. (61 kg)

#### Crate sizes:

61" (1549.4mm) x 49" (1244.6mm) x 79" (2006.6mm)

### GAS SUPPLY:

1" MNPT

#### Inlet Pressure:

Natural 7.0" W.C. static to unit  
Propane 11.0" W.C. static to unit

#### Maximum Input:

Hot Air 125,000 BTU/hr  
Boiler 90,000 BTU/hr  
Total 215,000 BTU/hr

### POWER SUPPLY:

Standard 115VAC 20 amp Nema 5-20R dedicated receptacle  
Option 208/240VAC 15 amp Nema 6-15 dedicated receptacle  
Export Export voltages available on request

Blodgett recommends a Pass & Seymour, model 2097, GFCI due to the use of a variable frequency drive. Must be hard wired in some cases.

### WATER SUPPLY & DRAIN:

Good quality water feed is the responsibility of the owner. Water quality must be within the following general guidelines.

TDS: 40-125 ppm Hardness: 35-100 ppm pH: 7.0 - 8.5  
Silica: <13 ppm Chlorides: <25 ppm Chlorine: <0.2 ppm  
Chloramine: <0.2 ppm

The best defense against poor water quality is a water treatment system designed to meet your water quality conditions. Blodgett offers optional systems from Optipure.

Pressure: 40(min)-50(max) PSI

Connections: 2" drain connection - max. drain temperature 140°F (60°C)  
3/4" garden hose cold water

The drain piping must consist of temperature resistant material, greater than 160°F, and be of adequate diameter not to cause flow restriction. Improper materials may deform and cause restrictions, thus affecting performance.

Appliance is to be installed with backflow protection in accordance with federal, state or local codes.

*NOTE: The company reserves the right to make substitutions of components without prior notice*

### BLODGETT OVEN COMPANY

www.blodgett.com • 42 Allen Martin Drive, Essex Junction, VT 05452 • Phone: (802) 658-6600 • Fax: (802) 864-0183