

BOTTOM-MOUNTED REACH-IN FREEZER



Toll Free Number: 1 (800) 931-8628



Email: Info@dukersusa.com



Website: www.dukersusa.com

MODEL: D83F

Features and Benefits

- * Higher Resistance to Dust , high quality condenser
- * R290 Natrual Refrigerant, promotes faste cool down and efficient energy consumption
- * 3-year parts and labor, 5-year compress warranty
- * Stainless steel inside and outside, sealed interior floors and rounder cabinet corner for easy cleaning
- Self-closing doors with stay open feature
- * Adjustable, heavy duty shelves

Technical Specifications

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel
Net Weight	595 lbs
Total Capacity	64.80 cu ft
Total Current	16A
Climatic Category	4/5
Nema Config.	5-20P













BOTTOM-MOUNTED REACH-IN FREEZER

MODEL: D83F

Model: D83F

Rated Voltage: 115V AC

Rated Frequency: 60Hz

Total Input Power: 1300W

Heating Power 900W

Total Current: 16A

Total Capacity: 64.80 cu ft

Refrigerant: R290/5.2 oz

Climatic Category: 4/5

Protection Type I

Design pressure High Side :300PSIG

Low Side:150PSIG

Insulation Blowing Gas C-pentane

Net Weight: 595 lbs

NEMA Config 5-20P

STANDARD FEATURES

BOTTOM MOUNT COMPRESSOR

The bottom mount compressor structure is placed in the coolest possible area, provides quick and easy service

HIGH QUALITY STEEL

Interior and exterior high quality steel minimizes dents, scratches and rust

HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

STURDY, CLEAN STAINLESS SHELVING

High quality coated stainless shelves may prevent peel and rust.


SELF-CLOSING DOOR SYSTEM


Door Automatically close at 60°

FREEZER HOLDS -8°F ~ -0°F FOR BEST IN FREEZER



PLAN VIEW

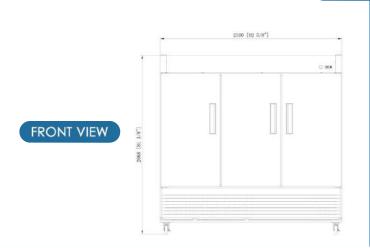





New Jersey Office 4475 S. Clinton Ave, South Plainfield, NJ 07080 (215) 808-8239 Info@dukersusa.com Los Angeles Office 2460 Peck Road, City of Industry, CA 90601 (562) 568-4060 Info@dukersusa.com