

RackStar® 66 with optional Energy Recovery

Project _____
Item _____
Quantity _____
CSI Section 11400
Approval _____
Date _____

RackStar® 66 with optional Energy Recovery

Models

RackStar 66 with optional Energy Recovery



Standard Features

- Energy Recovery
- Adjustable Rinse System
- 27kW electric booster heater
- Rainbow Rinse™ with arched rinse arm design
- 19-3/4" (502 mm) clearance
- WISR® Cleaning System
- Double-wall insulated doors retain heat, keeping wash water hot & generating less heat in the dishroom
- Self-cleaning wash arms
- Fully automatic, including auto-fill
- Adjustable vent cowl collars
- Exclusive EnergyGuard™ controls
- 22" pre-wash
- Self-draining stainless steel wash pump
- Digital LED control panel
- Strike plate table limit switch
- Large front access for ease of maintenance
- Stainless steel strainer pans
- Splash shields
- Stainless steel frame and legs
- Exhaust vent fan control
- Built-in pressure regulator
- 15kW wash tank heater
- Front dress panel
- Adjustable bullet feet

Mandatory Specs

Specify Voltage _____

Specify Direction of Operation:

- ☐ Left to Right
☐ Right to Left

Options

- ☐ Single Point Connection with Onboard Booster (3 phase only)
☐ 23" (584 mm) Unhooded Side Loader
☐ 30" (762 mm) Unhooded Side Loader
☐ Flanged Feet
☐ Prison Package

Accessories

- ☐ 36-Compartment Rack
☐ 4-1/8" tall (104 mm)
☐ 5 - 5/8" tall (143 mm)
☐ 7" tall (178 mm)
☐ Combination Rack
☐ Peg Rack
☐ Sheet Pan Rack
☐ Drain Quench System
☐ Scaltrol
☐ Water Hammer Arrestor

Specifications

Uses 0.35 gallons of water (1.32 liters) per rack in Econo Rinse mode

Uses 0.52 gallons of water (1.97 liters) per rack in Turbo Rinse mode

Cleans 223 racks per hour

Durable stainless steel construction

22" (559 mm) pre-wash section has three upper and one lower pre-wash arms






Intertek



RackStar® 66 with optional Energy Recovery


Left to Right

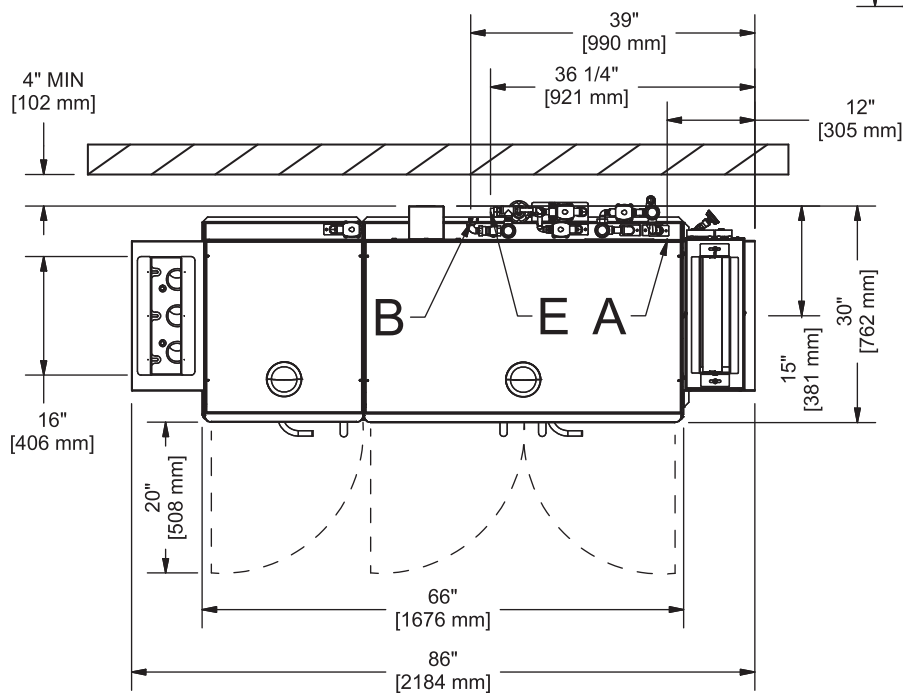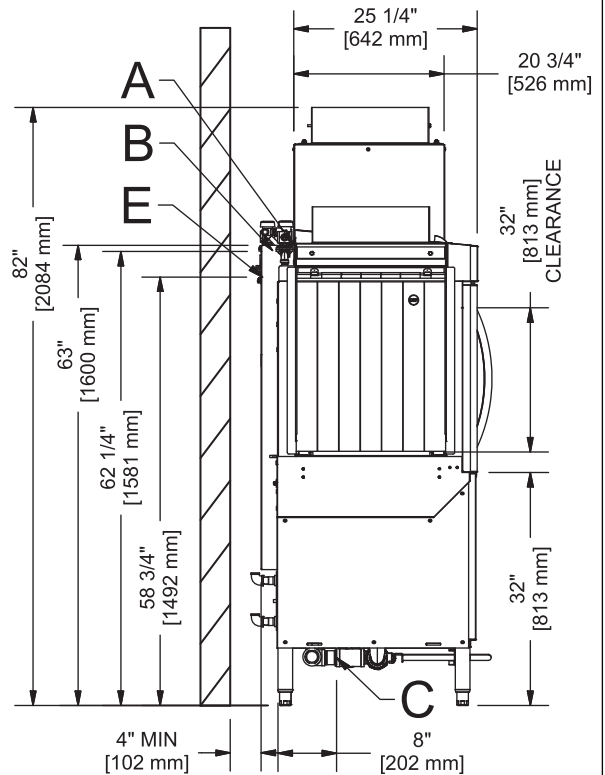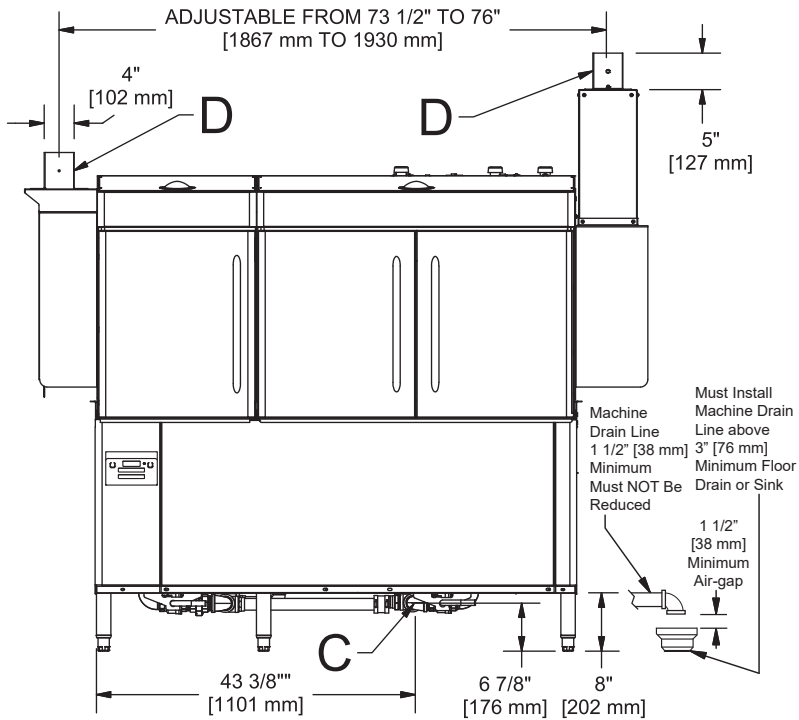

- A - Electrical Connection
(Provided on both sides of unit)
B - Water Inlet
(1/2" NPT, 110 °F MIN)
C - Drain Connection
(1 1/2" NPT)
D - Vent Connections
(Including Dampers)
E - Energy Recovery Water Inlet
(1/2" NPT, 55 °F MIN)
All dimensions from the floor can be increased 1 3/4" using the machine's adjustable feet.

RackStar® 66 with optional Energy Recovery

Right to Left

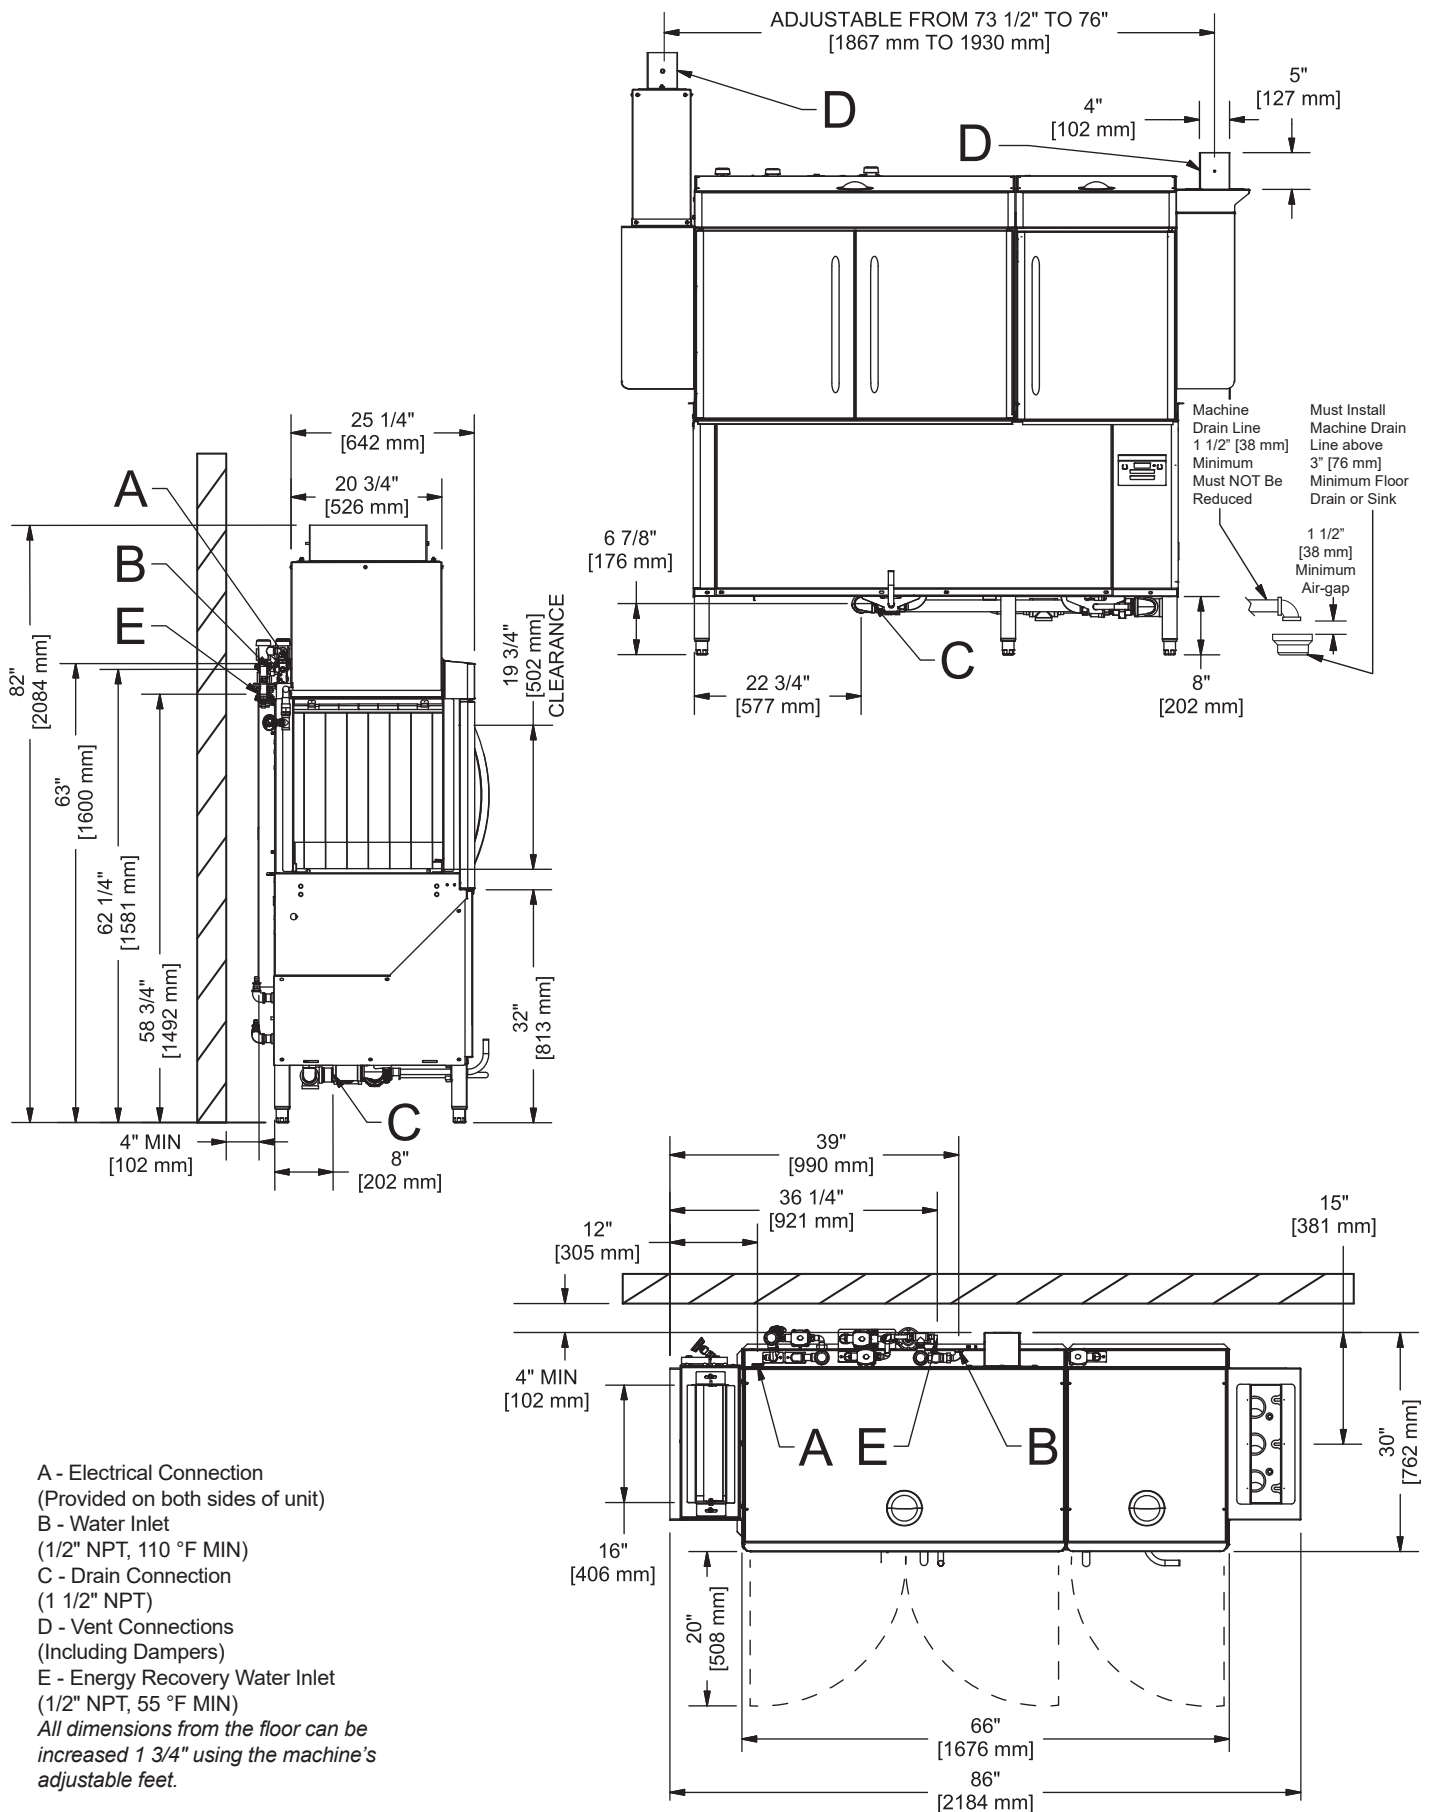

A - Electrical Connection
(Provided on both sides of unit)
B - Water Inlet
(1/2" NPT, 110 °F MIN)
C - Drain Connection
(1 1/2" NPT)
D - Vent Connections
(Including Dampers)
E - Energy Recovery Water Inlet
(1/2" NPT, 55 °F MIN)
All dimensions from the floor can be increased 1 3/4" using the machine's adjustable feet.

RECOMMENDED TABLE FABRICATION


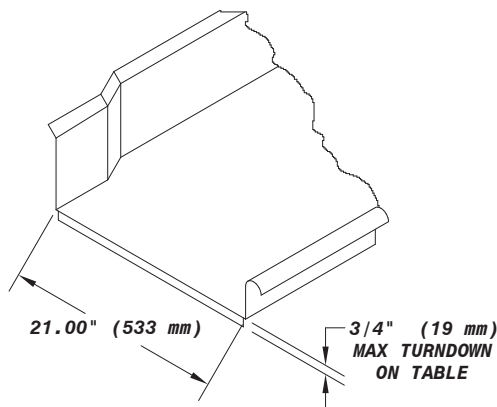


TABLE CONNECTION

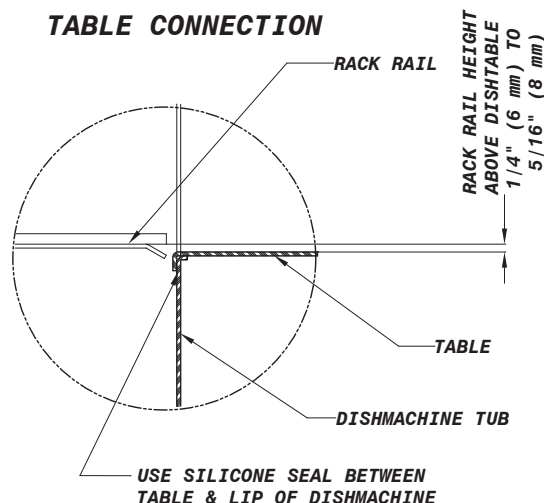

MODEL NO.	MACHINE DIMENSIONS				DRAIN HEIGHT	SHIPPING INFORMATION					
	HEIGHT	LENGTH BETWEEN DISHTABLES	DEPTH	DEPTH WITH DOORS OPEN		WEIGHT	CLASS	CUBE	HEIGHT	WIDTH	DEPTH
RackStar 66 ER	80-1/2" (2045 mm)	66" (1676 mm)	30" (762 mm)	50" (1270 mm)	6-1/2" (165 mm)	1193 lbs (542 kg)	150	166.67 cu. ft.	75" (1905 mm)	96" (2439 mm)	40" (1016 mm)

OPERATING CAPACITY

	High-Temperature	Chemical Sanitizing
Racks per Hour	223	223
Dishes per Hour	5,575	5,575
Glasses per Hour	8,028	8,028

OPERATING TEMPERATURES

	High-Temperature	Chemical Sanitizing
Pre-Wash (minimum)	110 -140° F (43-60° C)	110 -140° F (43-60° C)
Wash (minimum)	160° F (71° C)	120° F (49° C)
Rinse (minimum)	180° F (82° C)	120° F (49° C)

ELECTRICAL REQUIREMENTS

Approximate Total Load AMPS	
208V/60HZ/3PH	58.3
208V/60HZ/1PH	91.4
230V/60HZ/3PH	50.5
230V/60HZ/1PH	81.1
460V/60HZ/3PH	25.3

BOOSTER HEATER ELECTRICAL REQUIREMENTS

	70° F (38.9° C) Minimum Rise	
	kW	AMPS
208V/60HZ/3PH	27	75
208V/60HZ/1PH	27	130
230V/60HZ/3PH	27	65
230V/60HZ/1PH	27	113
460V/60HZ/3PH	27	33

*Total amp draw for a single point connection with onboard booster heater (3 phase only) is calculated by adding the amp load for the booster heater to the amp load for the machine.

HOW TO SPECIFY: RackStar 66 with Energy Recovery

WATER REQUIREMENTS

Hot water inlet temperature (minimum)	110° F (43° C)
Cold water inlet temperature (minimum)	55° F (43° C)
Gallons per Hour (Econo Rinse mode)	78 gal (295 L)
Gallons per Hour (Turbo Rinse mode)	116 gal (239.1 L)
Gallons per Rack (Econo Rinse mode)	0.35 gal (1.3 L)
Gallons per Rack (Turbo Rinse mode)	0.52 gal (1.97 L)
Waterline Size NPT	1/2"
Drainline Size IPS (minimum)	1-1/2"
Flow Pressure (PSI)	15
Flow Rate GPM (minimum)	1.3 (4.9 LPM)
Wash Tank Capacity	25 gal (95 L)

WASH PUMPS

Pre-Wash Pump Motor	2 hp
Pre-Wash Pump Capacity	220 GPM (833 LPM)
Wash Pump Motor	3 hp
Wash Pump Capacity	270 GPM (1022 LPM)

CONVEYOR

Conveyor Motor	1/4 hp
Conveyor Speed (feet per minute)	6.07 FPM (1.85 MPM)

VENTING REQUIREMENTS

Input End	175 CFM
Output End	175 CFM
Total CFM	350 CFM

Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734

Mailing Address: P.O. Box 1060, Barbourville, KY 40906

Telephone: 888-800-5672 • Fax: 606-523-1799

Email: info@jacksonwws.com

07610-004-43-17 [03/20/18]

www.jacksonwws.com

We reserve the right to change specifications in this bulletin without incurring any obligation for equipment previously or subsequently sold.