



DETAILS & SPECIFICATIONS

CHEF BASE

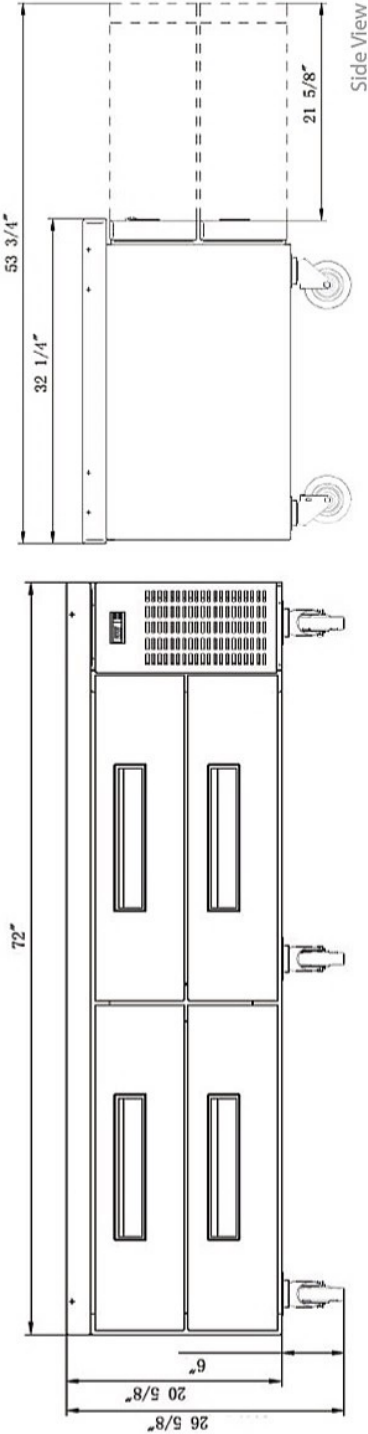

MODEL DCB72	
Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	255W
Total Current	2.549A
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PIG
Design Pressure Low	150 PIG
Insulation Blowing Gas	C-Pentane
Net Weight	308 lbs
Nema Config.	NEMA5-15P
Temperature Range	33~38°F
Heating	288W
40 HQ Container Certifica-	39
Refrigerant	R290/2.64oz

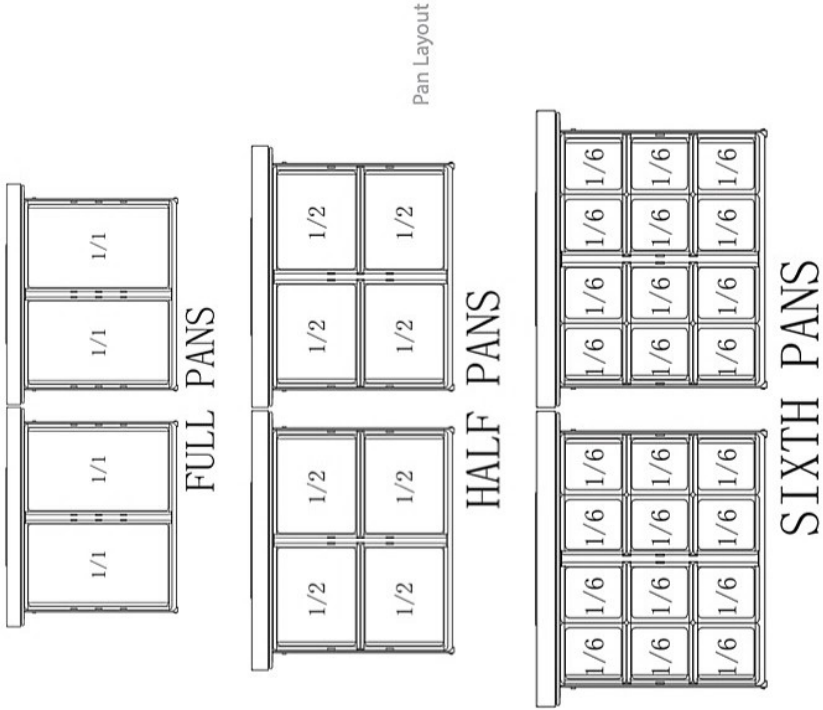

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
@info@dukersusa.-
www.DukersUSA.-



DUKERS

Quality Commercial Refrigeration

CHEF BASE MODEL DCB72



TECHNICAL SPECIFICATIONS

Voltage/Frequency 115V/60HZ
Refrigerant R290/2.64oz
Type of Defrost Automatic
Interior Material 304/201 Stainless Steel
Exterior Mate- 304/201 Stainless Steel
Total Current 2.549A
Climatic Category 4-5
Nema Config. NEMA5-15P

TEMPERATURE RANGE (F°)	EXTERNAL DIMENSION	PACKAGING DIMENSION	PRODUCT NET WEIGHT	DRAWERS	40 HO CONTAINER
33--38°F	72x32 1/4"x26 5/8"	73 5/8"x32 1/4"x29 1/8"	308 lbs	4	39

* All measures are presented in inches and



PRODUCT FEATURES

- Digital temperature control features a digital display to make monitoring interior temperatures a breeze. This unit also comes with an auto-defrost function.
- Foamed-in-place insulation keeps the interior cold and adds structural strength.
- Stainless steel interior with rounded corner for easy cleaning. Meet and exceed sanitation standards.
- Durable and high weight bearing rails for drawers.
- Heavy-duty 4" casters with brakes are included providing the unit with convenient mobility, making cleaning and servicing a breeze! Just roll the unit away.
- Ergonomic and modern recess door handle.
- Removable Drawer Gaskets, each drawer gasket is removable for easy cleaning and maintenance.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@info@dukersusa.-

www.DukersUSA.-