

Item# _____
Project: _____
Qty: _____

Glass Door Reach-In Freezer

GF-12
12 cu. ft. Freezer



GF-23
Single Door Freezer



GF-35
Double Door Freezer



GF-48
Double Door Freezer



Features

- Electronic Thermostat and Digital LED Temperature Display
- High Efficiency CFC Free and Insulation
- Self-Closing Door
- Low-e Triple Pane Glass Doors Remain Open Past 90°
- Epoxy Coated Shelves
- INTERIOR: White Powder-Coated Steel
- EXTERIOR: White Powder-Coated Steel
- LED Internal Lamp
- Top Illuminated Top Panel
- UL Safety and UL Sanitation Approved

You will appreciate the attractive professional aesthetics of these units which will add curb appeal to any type of business. Our units are featured with white powder coated steel interior and exterior, triple pane glass, self-closing lockable door, digital controls with a LED readout and foamed in place polyurethane cell insulation. Unit is shipped with wheels installed.

The bottom mounted compressor designed to hold temperatures between -10°F and 0° F.

Conforms to UL471, CSA C22.2 and NSF 7 Standards.

Two Year - Parts & Labor on entire unit. Valid in United States
Three Year - Additional Compressor, Part Only



Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 4/19


Fax:(800).976.1299



Serv-Ware

Glass Door Reach-In Freezer

GF-12 (A) & GF-16 (B) Single Door

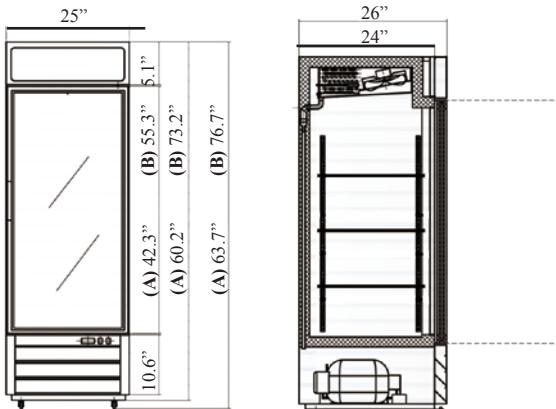

Dimensions

(A) GF-12
25" W x 26" D x 63.7" H
Net Volume 12 cu. ft.
Shipping Weight 276 lbs.

(B) GF-16
25" x W x 26" D x 76.7" H
16 cu. ft.
291 lbs.

Construction

Exterior Material
Interior Material
Insulation Material
Shelf Material

Powder Coated White Steel
Powder Coated White Steel
CFC Free Foam
3 Epoxy Coated Wire

Cooling

Temperature Range -10°F - 0°F
Refrigerant R404A
Defrosting Every 6 Hours
H/P GF-12 - $\frac{3}{8}$
GF-16 - $\frac{5}{8}$

Electrical

Voltage 115
Amps 6
Hz 60
Phase 1

Dimensions

Exterior Dimensions
Net Volume
Shipping Weight

27" W x 32" D x 81.5" H
23 cu. ft.
352 lbs

Construction

Exterior Material
Interior Material
Insulation Material
Shelf Material

Powder Coated White Steel
Powder Coated White Steel
CFC Free Foam
4 Epoxy Coated Wire


Cooling

Temperature Range -10° - 0°F
Refrigerant R404A
Defrosting Every 6 Hours
H/P $\frac{5}{8}$


Electrical

Voltage 115
Amps 11
Hz 60
Phase 1

GF-23 Single Door

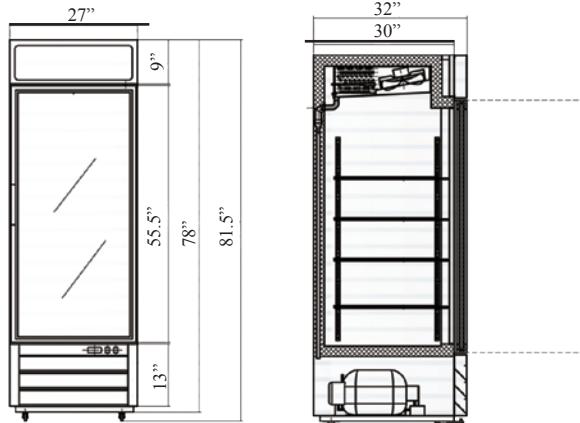

GF-35 (A) & GF-48 (B) Double Door

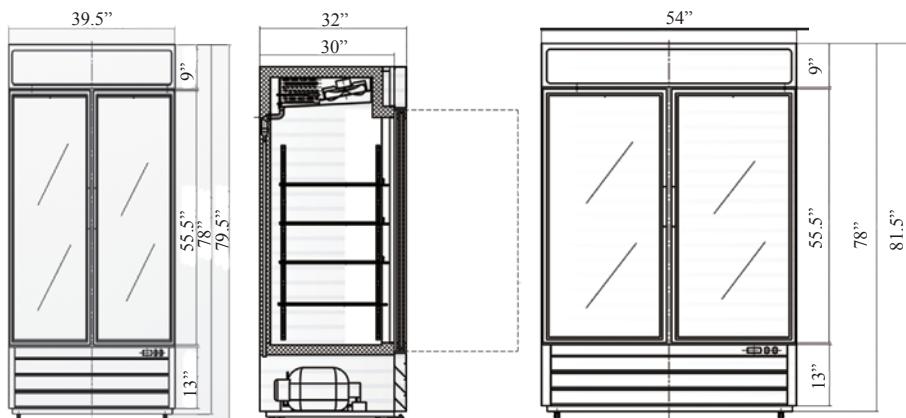

Dimensions

(A) GF-35
39.5" W x 32" D x 79.5" H
Net Volume 35 cu. ft.
Shipping Weight 493 lbs.

(B) GF-48
54" x W x 32" D x 81.5" H
49 cu. ft.
569 lbs.

Construction

Exterior Material
Interior Material
Insulation Material
Shelf Material

Powder Coated White Steel
Powder Coated White Steel
CFC Free Foam
8 Epoxy Coated Wire (4 Per Door)

Cooling

Temperature Range -10° - 0°F
Refrigerant R404A
Defrosting Every 6 Hours
H/P 1

Electrical

Voltage 115
Amps 12
Hz 60
Phase 1