

MODEL: D83R-GS3

Features and Benefits

- * Higher Resistance to Dust , high quality condenser
- * R290 Natural Refrigerant, promotes faster cool down and efficient energy consumption
- * 3-year parts and labor, 5-year compressor warranty
- * Stainless steel inside and outside, sealed interior floors and rounder cabinet corners for easy cleaning
- * Self-closing doors with stay open feature.
- * Adjustable, heavy duty shelves

Technical Specifications

Voltage/Frequency 115V/60Hz

Refrigerant R290

Type of Defrost Automatic

Exterior Finish Stainless steel

Interior Finish Stainless steel

Net Weight 595lbs

Total Capacity 64.80 cu ft

Total Current 8.6A

Climatic Category 4/5

Nema Config. 5-15P



MODEL NO	TEMPERATURE RANGE (°F)	EXTERNAL DIMENSION WXD XH(INCHES)	PACKING,CARTON WXD XH(INCHES)	DOOR	40GP CONTAINER CERTIFICATION
D83R-GS3	33 °F - 41 °F	82 ⁵ / ₈ " X 32 ⁵ / ₈ " X 80 ³ / ₈ "	84 ¹ / ₄ " X 34 ¹ / ₄ " X 84 ³ / ₈ "	3	13

BOTTOM MOUNTED REACH-IN REFRIGERATOR

MODEL:D83R-GS3

Model:	D83R-GS3
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	760W
Total Current:	8.6A
Total Capacity:	64.80 cu ft
Refrigerant:	R290/5.22 oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :300PSIG Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	595 lbs
NEMA Config	5-20P

STANDARD FEATURES

BOTTOM MOUNTED COMPRESSOR

The top mount compressor structure is placed in the coolest possible area, provides quick and easy service

HIGH QUALITY STEEL

Interior and exterior high quality steel minimizes dents, scratches and rust

HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

STURDY, CLEAN STAINLESS SHELVING

High quality coated stainless shelves may prevent peel and rust.

SELF-CLOSING DOOR SYSTEM

Door Automatically close at 60°

REFRIGERATORS HOLDS 33 °F - 41 °F FOR BEST IN REFRIGERATORS




NEMA 5-20P

115/60/1

PLAN VIEW

FRONT VIEW

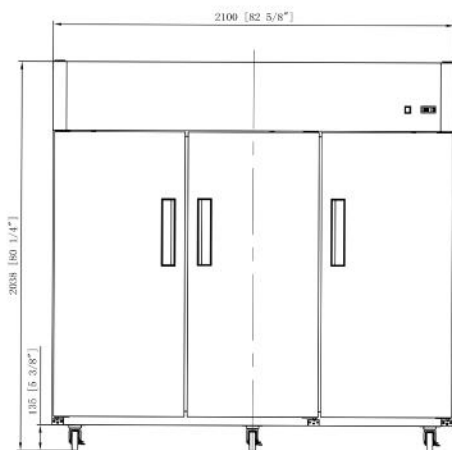

SIDE VIEW

