

## Models

Delta® 5-E



## Standard Features

- Functions as both a glass-washer and a dishwasher, accommodating wares up to 11-1/2" (292 mm) high
- Push-button start
- Electromechanical controls
- Easily accessible controls
- Built-in chemical pumps and priming switches
- Stainless steel wash pump
- Lower rotary wash arm and fixed upper jets
- Door switch
- Adjustable bullet feet
- Swing-out control box for easy service and access
- Side control panel for easy access to switches
- Dial temperature gauge for constant monitoring of temperature
- Side skirt panels
- Latch-type front (lower) panel
- Delime/manual wash switch

## Options

- ☐ Water Hammer Arrestor
- ☐ Scale Prevention System (SPS)
- ☐ Replacement Cartridge for SPS

## Accessories

- ☐ 36-Compartment Rack
  - ☐ 4-1/8" tall (105 mm)
  - ☐ 5-5/8" tall (143 mm)
  - ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack
- ☐ Flat Rack
- ☐ Half Rack

## Specifications


|   |  |
|---|--|
| Uses only 1.16 gallons (4.39 liters) of water per cycle | 11-1/2" (292 mm) wash chamber clearance  |
| Cleans 40 racks per hour                                | Gravity drain  |
| 1,440 glasses per hour                                  | Built-in waste accumulator   |
| 90-second operating cycle                               | Sustaining heating element maintains final rinse between 120°F (49°C) and 140°F (60°C) |
| Powerful 1 hp wash pump motor                           | Removable end plugs on lower wash arm and removable upper jets                         |
| Built-in chemical pumps and priming switches            | Durable stainless steel construction   |
| Air-gap water inlet                                     |  |



Intertek



## Delta® 5-E

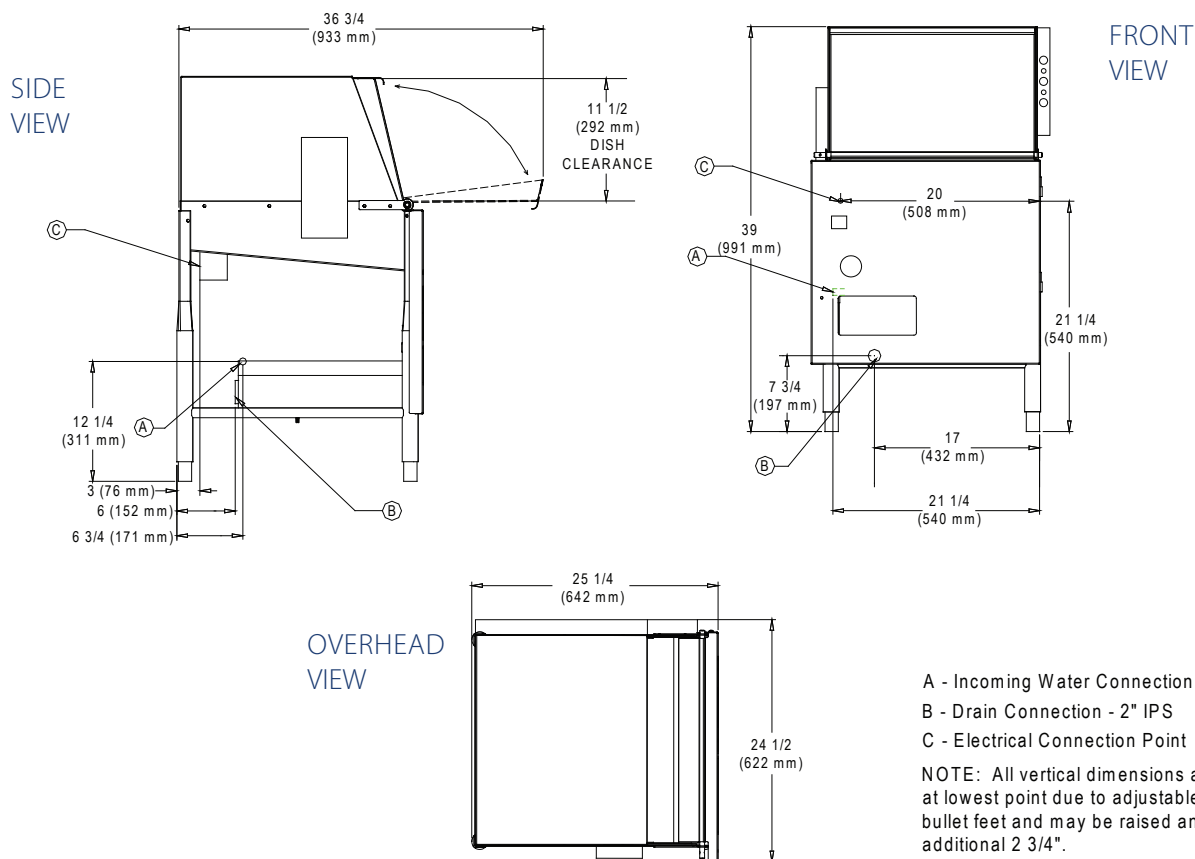

| MODEL NO.  | MACHINE DIMENSIONS      |                        |                        |                  | WALL CLEARANCE | SHIPPING INFORMATION |       |               |                 |              |                |
|------------|-------------------------|------------------------|------------------------|------------------|----------------|----------------------|-------|---------------|-----------------|--------------|----------------|
|            | INSIDE CLEARANCE HEIGHT | INSIDE CLEARANCE WIDTH | INSIDE CLEARANCE DEPTH | DOOR OPEN DEPTH  |                | WEIGHT               | CLASS | CUBE          | HEIGHT          | WIDTH        | DEPTH          |
| Delta® 5-E | 11-1/2" (292 mm)        | 20-1/4" (514 mm)       | 20-1/2" (521 mm)       | 36-3/4" (933 mm) | 2" (51 mm)     | 230 lbs (105 kg)     | 100   | 23.32 cu. ft. | 50.5" (1283 mm) | 28" (712 mm) | 28.5" (724 mm) |

| APPROXIMATE TOTAL AMP LOADS |      |
|-----------------------------|------|
| 115/60/1                    | 16.0 |

| WASH PUMP |      |
|-----------|------|
| Wash Pump | 1 hp |

| BOOSTER HEATER            |        |
|---------------------------|--------|
| Rinse Tank Booster Heater | 2.0 kW |

| WATER REQUIREMENTS       |                   |
|--------------------------|-------------------|
| Gallons per Hour         | 46.4 gal (176 L)  |
| Flow Rate (GPM)          | 6.33 gal (24 L)   |
| Flow Pressure (PSI)      | 15 - 25           |
| Waterline Size (IPS)     | 1/2"              |
| Drainline Size (OD)      | 2"                |
| Tank Capacity            | 1.16 gal (4.39 L) |
| Wash Pump Capacity (GPM) | 61 gal (231 L)    |

| HOW TO SPECIFY: Delta® 5-E |  |
|----------------------------|--|
|----------------------------|--|

| OPERATING CAPACITY |       |
|--------------------|-------|
| Racks per Hour     | 40    |
| Dishes per Hour    | 1,000 |
| Glasses per Hour   | 1,440 |

| OPERATING CYCLE       |    |
|-----------------------|----|
| Wash Cycle (seconds)  | 40 |
| Rinse Cycle (seconds) | 24 |
| Dwell Time (seconds)  | 18 |
| Total Cycle (seconds) | 85 |

| OPERATING TEMPERATURES |                  |
|------------------------|------------------|
| Wash (minimum)         | 120° F (48.9° C) |
| Wash (recommended)     | 140° F (60° C)   |

| SANITIZERS AVAILABLE |        |
|----------------------|--------|
| Sodium Hypochlorite  | 50 PPM |
| Iodophor             | 12 PPM |

### Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734

Mailing Address: P.O. Box 1060, Barbourville, KY 40906

Telephone: 888-800-5672 • Fax: 606-523-1799

Email: info@jacksonwws.com

07610-004-13-56 [03/31/17]

[www.jacksonwws.com](http://www.jacksonwws.com)

We reserve the right to change specifications in this bulletin without incurring any obligation for equipment previously or subsequently sold.